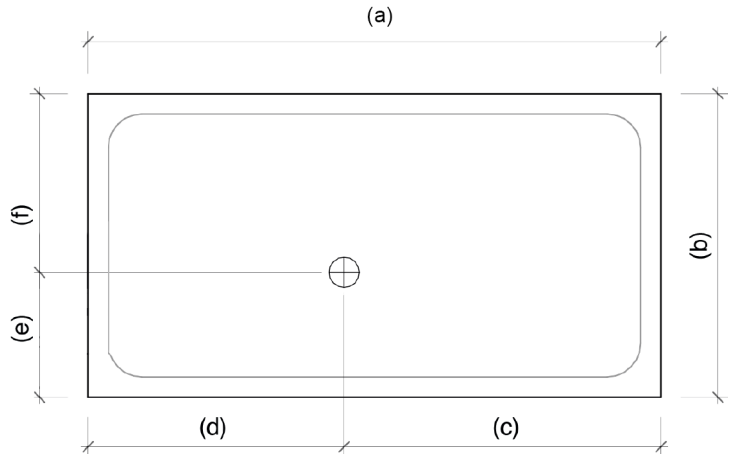


| 1 | ShowerTray_50mm Height_Rectangle | Plan |
|---|---|---|

| (a) mm | (b) mm | (c) mm | (d) mm | (e) mm | (f) mm |
|---|---|---|---|---|---|
| 1700 | 900 | 940 | 760 | 360 | 540 |
| 1700 | 750 | 940 | 760 | 285 | 465 |
| 1600 | 900 | 890 | 710 | 360 | 540 |
| 1600 | 800 | 890 | 710 | 310 | 490 |
| 1500 | 900 | 840 | 660 | 360 | 540 |
| 1500 | 800 | 840 | 660 | 310 | 490 |
| 1400 | 900 | 790 | 610 | 360 | 540 |
| 1400 | 800 | 790 | 610 | 310 | 490 |
| 1200 | 1000 | 690 | 510 | 410 | 590 |
| 1200 | 900 | 690 | 510 | 360 | 540 |
| 1200 | 800 | 690 | 510 | 310 | 490 |
| 1200 | 760 | 690 | 510 | 290 | 470 |
| 1100 | 900 | 640 | 460 | 360 | 540 |
| 1100 | 800 | 640 | 460 | 310 | 490 |
| 1000 | 900 | 590 | 410 | 360 | 540 |
| 1000 | 800 | 590 | 410 | 310 | 490 |
| 1000 | 760 | 590 | 410 | 290 | 470 |
| 900 | 800 | 540 | 360 | 310 | 490 |
| 900 | 760 | 540 | 360 | 290 | 470 |

| 2 | ShowerTray_50mm Height_Rectangle | Tray Size Schedule |
|---|---|---|

**Detailed Description**
All shower trays manufactured In accordance with BS EN ISO 9001 Quality Management System and BS EN ISO 14001 Environmental Standards.

DOP CM 001.1 11012018

**Material:**
Gelcoat surface, stone resin structure.

**Depth:**
50 mm.

**Colour:**
Available in all colours.

**Waste:**
50mm shower trays have been designed for use with McAlpine ST90CB10-HP2 or ST90CB10-70 with flow rates of 42 and 34 litres per minute when tested in accordance with EN274-2:2002 www.mcaplineplumbing.com

| 3 | ShowerTray_50mm Height_Rectangle | Detailed Description |
|---|---|---|

NOTES:

**Waterproofing**
When installing a Classic Marble shower tray it is recommended to use the Classi Bathroom Waterproofing range of products www.waterproofyourbathroom.com/shower-trays

**Guarantee:**
10 Years

**Cleaning**
Ensure that the tray is washed with soap and water and dried with a soft cloth after each use.

**Important:**
When wet the surface of the majority of shower trays will show an increase in the potential for slipping. This is particularly the case when soap, shampoo, bath oil etc are used. It is important that designers, installers and users are aware of this.

ORIGINAL BY Classic Marble

DATE **19/06/2019**

**Contact**
Classic Marble |185 Omagh Road | Ballygawley | Dungannon | Co. Tyrone | N.Ireland | BT70 2AL

CLASSIC MARBLE

Drawing Name: Shower Tray - Classic Marble Rectangular - Technical Data Sheet
Drawing Number: ShowerTray_50mm Height_Rectangle
Drawing Status: Information Rev: P1

THIS DRAWING IS PROPERTY OF CLASSIC MARBLE AND REMAINS PROPERTY OF CLASSIC MARBLE. ANY DRAWING DISCREPANCY SHOULD BE NOTIFIED TO THE DRAWING ORIGINATOR IMMEDIATELY. THIS DRAWING SHOULD NOT BE COPIED WITHOUT NOTIFICATION TO THE OWNER. THIS DRAWING IS FOR PLANNING PURPOSES ONLY & NO DIMENSIONS SCALING SHOULD BE USED FOR FABRICATION. ALL DIMENSIONS TO BE MEASURED ON SITE PRIOR TO MANUFACTURE OF ANY PROPOSALS

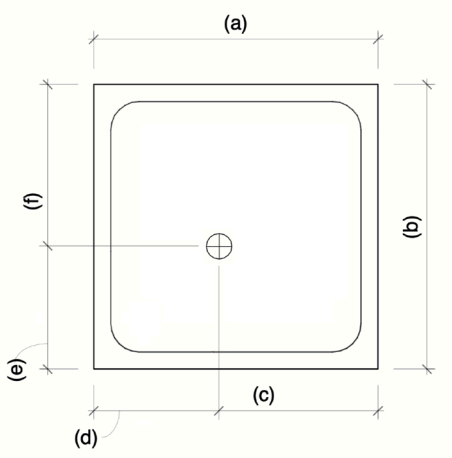


| 1 | ShowerTray_50mm Height_Square | Plan |
|---|---|---|

| (a) mm | (b) mm | (c) mm | (d) mm | (e) mm | (f) mm |
|---|---|---|---|---|---|
| 1000 | 1000 | 590 | 410 | 410 | 590 |
| 900 | 900 | 540 | 360 | 360 | 540 |
| 800 | 800 | 490 | 310 | 310 | 490 |
| 760 | 760 | 470 | 290 | 290 | 470 |

| 2 | ShowerTray_50mm Height_Square | Tray Size Schedule |
|---|---|---|

**Detailed Description**
All shower trays manufactured In accordance with BS EN ISO 9001 Quality Management System and BS EN ISO 14001 Environmental Standards.

DOP CM 001.1 11012018

**Material:**
Gelcoat surface, stone resin structure.

**Depth:**
50 mm.

**Colour:**
Available in all colours.

**Waste:**
50mm shower trays have been designed for use with McAlpine ST90CB10-HP2 or ST90CB10-70 with flow rates of 42 and 34 litres per minute when tested in accordance with EN274-2:2002
www.mcaplineplumbing.com

| 3 | ShowerTray_50mm Height_Square | Detailed Description |
|---|---|---|

NOTES:

**Waterproofing**
When installing a Classic Marble shower tray it is recommended to use the Classi Bathroom Waterproofing range of products www.waterproofyourbathroom.com/shower-trays

**Guarantee:**
10 Years

**Cleaning**
Ensure that the tray is washed with soap and water and dried with a soft cloth after each use.

**Important:**
When wet the surface of the majority of shower trays will show an increase in the potential for slipping. This is particularly the case when soap, shampoo, bath oil etc are used. It is important that designers, installers and users are aware of this.

ORIGINAL BY Classic Marble

DATE **19/06/2019**

**Contact**
Classic Marble |185 Omagh Road | Ballygawley | Dungannon | Co. Tyrone | N.Ireland | BT70 2AL

CLASSIC MARBLE

Drawing Name: Shower Tray - Classic Marble Square - Technical Data Sheet
Drawing Number: ShowerTray_50mm Height_Square
Drawing Status: Information Rev: P1

THIS DRAWING IS PROPERTY OF CLASSIC MARBLE AND REMAINS PROPERTY OF CLASSIC MARBLE. ANY DRAWING DISCREPANCY SHOULD BE NOTIFIED TO THE DRAWING ORIGINATOR IMMEDIATELY. THIS DRAWING SHOULD NOT BE COPIED WITHOUT NOTIFICATION TO THE OWNER. THIS DRAWING IS FOR PLANNING PURPOSES ONLY & NO DIMENSIONS SCALING SHOULD BE USED FOR FABRICATION. ALL DIMENSIONS TO BE MEASURED ON SITE PRIOR TO MANUFACTURE OF ANY PROPOSALS

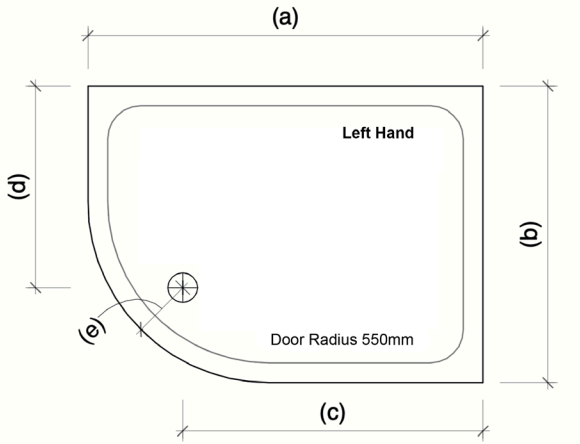


| 1 | ShowerTray_50mm Height_Offset Quadrant Left Hand | Plan |
|---|---|---|

| (a) mm | (b) mm | (c) mm | (d) mm | (e) mm |
|---|---|---|---|---|
| 1200 | 800 | 910 | 510 | 200 |
| 1200 | 900 | 910 | 610 | 200 |
| 1000 | 800 | 710 | 510 | 200 |
| 900 | 800 | 610 | 510 | 200 |

| 2 | ShowerTray_50mm Height_Offset Quadrant Left Hand | Tray Size Schedule |
|---|---|---|

**Detailed Description**
All shower trays manufactured In accordance with BS EN ISO 9001 Quality Management System and BS EN ISO 14001 Environmental Standards.

DOP CM 001.1 11012018

**Material:**
Gelcoat surface, stone resin structure.

**Depth:**
50 mm.

**Colour:**
Available in all colours.

**Waste:**
50mm shower trays have been designed for use with McAlpine ST90CB10-HP2 or ST90CB10-70 with flow rates of 42 and 34 litres per minute when tested in accordance with EN274-2:2002 www.mcaplineplumbing.com

| 3 | ShowerTray_50mm Height_Offset Quadrant Left Hand | Detailed Description |
|---|---|---|

NOTES

**Waterproofing**
When installing a Classic Marble shower tray it is recommended to use the Classi Bathroom Waterproofing range of products www.waterproofyourbathroom.com/shower-trays

**Guarantee:**
10 Years

**Cleaning**
Ensure that the tray is washed with soap and water and dried with a soft cloth after each use.

**Important:**
When wet the surface of the majority of shower trays will show an increase in the potential for slipping. This is particularly the case when soap, shampoo, bath oil etc are used. It is important that designers, installers and users are aware of this.

ORIGINAL BY Classic Marble

DATE **19/06/2019**

**Contact**
Classic Marble |185 Omagh Road | Ballygawley | Dungannon | Co. Tyrone | N.Ireland | BT70 2AL

CLASSIC MARBLE

Drawing Name: Shower Tray - Classic Marble Quadrant LH - Technical Data Sheet
Drawing Number: ShowerTray_50mm Height_Offset Quadrant Left Hand
Drawing Status: Information Rev: P1

THIS DRAWING IS PROPERTY OF CLASSIC MARBLE AND REMAINS PROPERTY OF CLASSIC MARBLE. ANY DRAWING DISCREPANCY SHOULD BE NOTIFIED TO THE DRAWING ORIGINATOR IMMEDIATELY. THIS DRAWING SHOULD NOT BE COPIED WITHOUT NOTIFICATION TO THE OWNER. THIS DRAWING IS FOR PLANNING PURPOSES ONLY & NO DIMENSIONS SCALING SHOULD BE USED FOR FABRICATION. ALL DIMENSIONS TO BE MEASURED ON SITE PRIOR TO MANUFACTURE OF ANY PROPOSALS

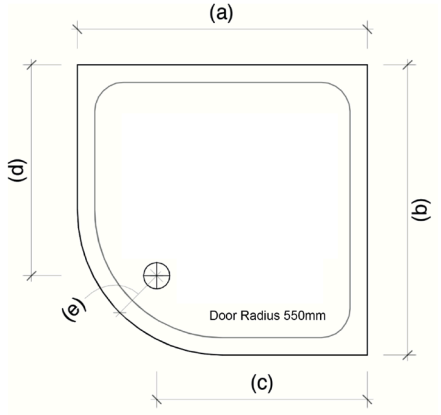


1 | ShowerTray_50mm Height_Quadrant | Plan

| (a) mm | (b) mm | (c) mm | (d) mm | (e) mm |
|---|---|---|---|---|
| 1000 | 1000 | 710 | 710 | 200 |
| 900 | 900 | 610 | 610 | 200 |
| 800 | 800 | 510 | 510 | 200 |

2 | ShowerTray_50mm Height_Quadrant | Tray Size Schedule

**Detailed Description**
All shower trays manufactured In accordance with BS EN ISO 9001 Quality Management System and BS EN ISO 14001 Environmental Standards.

DOP CM 001.1 11012018

**Material:**
Gelcoat surface, stone resin structure.

**Depth:**
50 mm.

**Colour:**
Available in all colours.

**Waste:**
50mm shower trays have been designed for use with McAlpine ST90CB10-HP2 or ST90CB10-70 with flow rates of 42 and 34 litres per minute when tested in accordance with EN274-2:2002
www.mcaplineplumbing.com

3 | ShowerTray_50mm Height_Quadrant | Detailed Description

NOTES:

**Waterproofing**
When installing a Classic Marble shower tray it is recommended to use the Classi Bathroom Waterproofing range of products www.waterproofyourbathroom.com/shower-trays

**Guarantee:**
10 Years

**Cleaning**
Ensure that the tray is washed with soap and water and dried with a soft cloth after each use.

**Important:**
When wet the surface of the majority of shower trays will show an increase in the potential for slipping. This is particularly the case when soap, shampoo, bath oil etc are used. It is important that designers, installers and users are aware of this.

ORIGINAL BY
Classic Marble

DATE **19/06/2019**

**Contact**
Classic Marble |185 Omagh Road | Ballygawley | Dungannon | Co. Tyrone | N.Ireland | BT70 2AL

CLASSIC MARBLE

Drawing Name: Shower Tray - Classic Marble Quadrant - Technical Data Sheet
Drawing Number: ShowerTray_50mm Height_Quadrant
Drawing Status: Information Rev: P1

THIS DRAWING IS PROPERTY OF CLASSIC MARBLE AND REMAINS PROPERTY OF CLASSIC MARBLE. ANY DRAWING DISCREPANCY SHOULD BE NOTIFIED TO THE DRAWING ORIGINATOR IMMEDIATELY. THIS DRAWING SHOULD NOT BE COPIED WITHOUT NOTIFICATION TO THE OWNER. THIS DRAWING IS FOR PLANNING PURPOSES ONLY & NO DIMENSIONS SCALING SHOULD BE USED FOR FABRICATION. ALL DIMENSIONS TO BE MEASURED ON SITE PRIOR TO MANUFACTURE OF ANY PROPOSALS

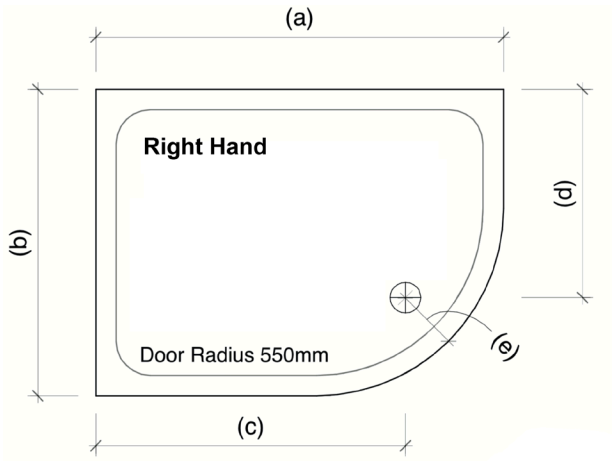


| | | |
|---|---|---|
| 1 | ShowerTray_50mm Height_Offset Quadrant Right Hand | Plan |

| (a) mm | (b) mm | (c) mm | (d) mm | (e) mm |
|---|---|---|---|---|
| 1200 | 800 | 910 | 510 | 200 |
| 1200 | 900 | 910 | 610 | 200 |
| 1000 | 800 | 710 | 510 | 200 |
| 900 | 800 | 610 | 510 | 200 |

| | | |
|---|---|---|
| 2 | ShowerTray_50mm Height_Offset Quadrant Right Hand | Tray Size Schedule |

**Detailed Description**
All shower trays manufactured In accordance with BS EN ISO 9001 Quality Management System and BS EN ISO 14001 Environmental Standards.

DOP CM 001.1 11012018

**Material:**
Gelcoat surface, stone resin structure.

**Depth:**
50 mm.

**Colour:**
Available in all colours.

**Waste:**
50mm shower trays have been designed for use with McAlpine ST90CB10-HP2 or ST90CB10-70 with flow rates of 42 and 34 litres per minute when tested in accordance with EN274-2:2002 www.mcaplineplumbing.com

| | | |
|---|---|---|
| 3 | ShowerTray_50mm Height_Offset Quadrant Right Hand | Detailed Description |

NOTES:

**Waterproofing**
When installing a Classic Marble shower tray it is recommended to use the Classi Bathroom Waterproofing range of products www.waterproofyourbathroom.com/shower-trays

**Guarantee:**
10 Years

**Cleaning**
Ensure that the tray is washed with soap and water and dried with a soft cloth after each use.

**Important:**
When wet the surface of the majority of shower trays will show an increase in the potential for slipping. This is particularly the case when soap, shampoo, bath oil etc are used. It is important that designers, installers and users are aware of this.

ORIGINAL BY Classic Marble

DATE **19/06/2019**

**Contact**
Classic Marble |185 Omagh Road | Ballygawley | Dungannon | Co. Tyrone | N.Ireland | BT70 2AL

CLASSIC MARBLE

Drawing Name: Shower Tray - Classic Marble Quadrant RH - Technical Data Sheet
Drawing Number: ShowerTray_50mm Height_Offset Quadrant Right Hand
Drawing Status: Information Rev: P1

THIS DRAWING IS PROPERTY OF CLASSIC MARBLE AND REMAINS PROPERTY OF CLASSIC MARBLE. ANY DRAWING DISCREPANCY SHOULD BE NOTIFIED TO THE DRAWING ORIGINATOR IMMEDIATELY. THIS DRAWING SHOULD NOT BE COPIED WITHOUT NOTIFICATION TO THE OWNER. THIS DRAWING IS FOR PLANNING PURPOSES ONLY & NO DIMENSIONS SCALING SHOULD BE USED FOR FABRICATION. ALL DIMENSIONS TO BE MEASURED ON SITE PRIOR TO MANUFACTURE OF ANY PROPOSALS